

FLAMMABLE

Solids Cabinets Class 4

Trafalgar Safety is a proudly Australian business which has been creating quality specialty building products and solutions since 1945.



Patented Concealed Stay-Open Sequential Self-Closing Door Mechanism

Removable feet for easy forklift access and mobility

Right door stays open for easier loading and unloading. 7 locking positions between 20-90 degrees.



Fully-adjustable galvanised shelves


Magnetic catch

Key Features

- Patented Concealed Stay-Open Sequential Self-Closing Door Mechanism
- 180° opening doors
- Magnetic catch
- Fully-adjustable galvanised shelves
- Range of sizes to choose from and custom manufacturing available

Storage Solutions

- **Flammable Solids - Class 4.1**
- **Spontaneously Combustible - Class 4.2**
- **Dangerous When Wet - Class 4.3**

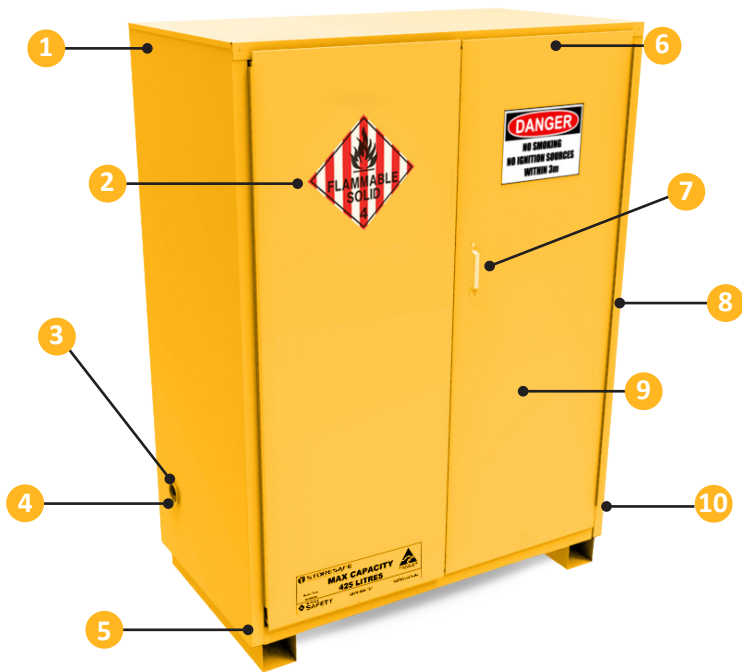

Flammable Solids Range

Proudly made in Australia, in accordance with Australian Standards and comply with AS 5026-2012. Patented concealed 'Stay-Open' double door design makes loading and unloading dangerous chemicals safer and easier.



Key Features

- 1 Powder coating inside and out - durable finish
- 2 Danger alert sign
- 3 Ventilation ports, measuring 55mm in diameter
- 4 Fully welded 150mm deep liquid tight sump
- 5 Rounded corners on door
- 6 1.1mm thick double skin wall construction, with 40mm air gap between walls to provide thermal insulation
- 7 Magnetic catch
- 8 Continuous piano hinges ensuring smooth closure of door
- 9 Full instructions on usage of cabinet included inside
- 10 Built in ground connector

Flammable Solids Cabinet Range

Part Number	Capacity (L)	Shelves	External Dimensions (mm)			Internal Dimensions (mm)			Weight (kg)
			Height	Width	Depth	Height	Width	Depth	
TCFLS30L	30	1	805	520	475	535	425	375	53
TCFLS60L	60	2	1070	520	475	800	425	375	62
TCFLS100L	100	1	810	935	680	560	835	530	100
TCFLS160L	160	2	1295	1115	525	1045	1015	375	138
TCFLS250L	250	3	1830	1115	525	1580	1015	375	187

NOTE: External dimensions for height for all models except 30L and 60L increase by 95mm with removable feet attached.