

# CORROSIVE

Substance Storage Cabinets



PATENTED CONCEALED  
STAY-OPEN SEQUENTIAL  
SELF-CLOSING DOOR  
MECHANISM



**RIGHT DOOR STAYS OPEN  
FOR EASIER LOADING AND  
UNLOADING!  
7 LOCKING POSITIONS  
BETWEEN 20 – 90 DEGREES**



### Trafalgar range of safety cabinets:

Flammable Liquid | Corrosive Substance  
Toxic Substance | Forklift Gas Cylinder  
Organic Peroxide | Oxidising Agent  
Aerosol | Emergency Information  
Fire Hose Reel | Fire Extinguisher  
Fire Hydrant Booster | Fire Alarm Cabinet

# CORROSIVE

Substance Storage Cabinets

## Key Features & Benefits

**Trafalgar** is a long established and privately owned Australian company whose name is synonymous with the supply of hazardous chemical storage cabinets. Trafalgar has been making safety cabinets for over 50 years and will continue to do so into the future. We are proud to be fighting hard to keep manufacturing alive in Australia and competing against cheap and inferior imported products. From our manufacturing plant in Sydney's west, Trafalgar's range of **Corrosive Substance Storage Cabinets** are all locally made, built in accordance with Australian Standards and come in a range of sizes. A full range of spare parts, including additional shelves and closing mechanisms are available.



### Corrosive Substance Storage Cabinets

**SUITABLE FOR SAFE STORAGE OF** corrosive substances that are listed as **Class 8** corrosive substances in the Australian Dangerous Goods code or that meet the classification in that code for corrosive substances.

All cabinets comply with **AS3780-2008** as follows:-

1. Each cabinet is marked with the name and address of the manufacturer.
2. The maximum storage capacity.
3. A Class 8 dangerous goods label with sides of a least 100mm nominal.

**Trafalgar has the expertise and capabilities to custom manufacture safety cabinets.** Contact us to discuss your specific requirements.

# CORROSIVE

Substance Storage Cabinets

# Product Overview

Powder coating inside and out, providing a hardwearing finish.


Danger alert sign indicating specific hazardous substances stored in cabinets.

Ventilation port, measuring 55mm in diameter.

Fully welded 150mm deep liquid tight sump.

Round corners on door.

Internal shelf brackets that fully interlock with shelves.

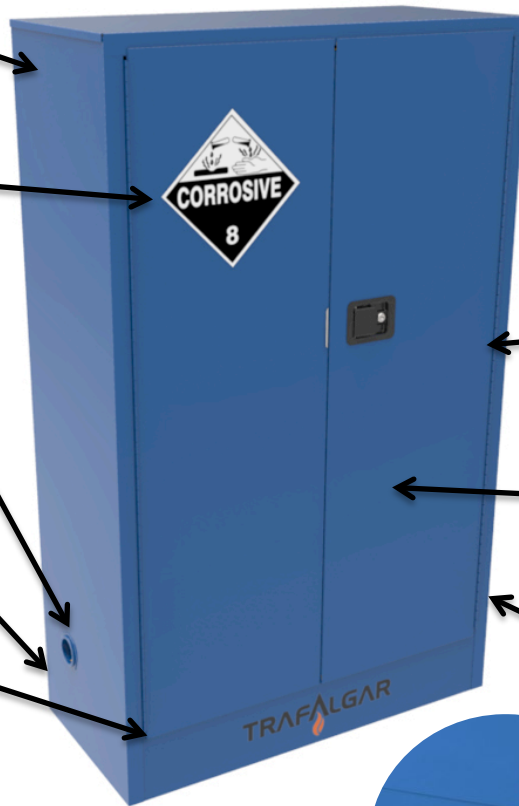

1.1mm thick double skin wall construction, with 40mm air gap between walls to provide thermal insulation.

Ventilation port, measuring 55mm in diameter.


Continuous piano hinges ensuring smooth closure of door.

Full instructions on usage of the cabinet attached to the inside of the door.

Build in ground connector.



Removable forklift channels

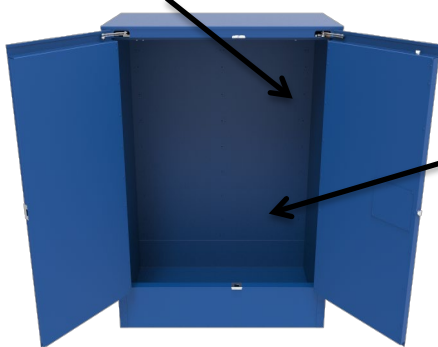

Fully adjustable galvanised shelves included, perforated for leakages and to permit free air flow. Easily replaced if damaged. Additional shelving available for purchase.



Recessed handle with key lock which can be opened from the inside, as per Australian Standards. Two keys supplied.



Concealed self-closing door mechanism for more durability and usable space. Patented self closing sequential door mechanism on double door cabinets allows for right door to stay open at 7 locking positions between 20 – 90° for easier loading and unloading.



Three point self latching door mechanism.

# CORROSIVE

Substance Storage Cabinets

# Ordering Information

## CORROSIVE SUBSTANCE STORAGE CABINETS

Capacity (L)	30	60	100	160	250
Capacity (Units)	1 x 20L or 6 x 2.5L Tins	2 x 20L or 12 x 2.5L Tins	3 x 20L or 15 x 2.5L Tins	6 x 20L Drums	9 x 20L Drums
Part Number	TCCSS30L	TCCSS60L	TCCSS100L	TCCSS160L	TCCSS250L
Shelves	1	2	1	2	3
External Height (mm)	805	1070	810	1295	1830
External Width (mm)	520	520	935	1115	1115
External Depth (mm)	475	475	680	525	525
Internal Height (mm)	535	800	560	1045	1580
Internal Width (mm)	425	425	835	1015	1015
Internal Depth (mm)	375	375	530	375	475
Weight (kg)	53	62	100	138	187



30L



60L



100L



160L



250L

Trafalgar reserves the right to change specifications without notice. Please check with your supplier at the time of order. The information contained in this brochure was correct at the time of print. E&OE. Published 20.06.18